


# MT-55 Series Chassis

## The Optimum Heavy-Duty Chassis

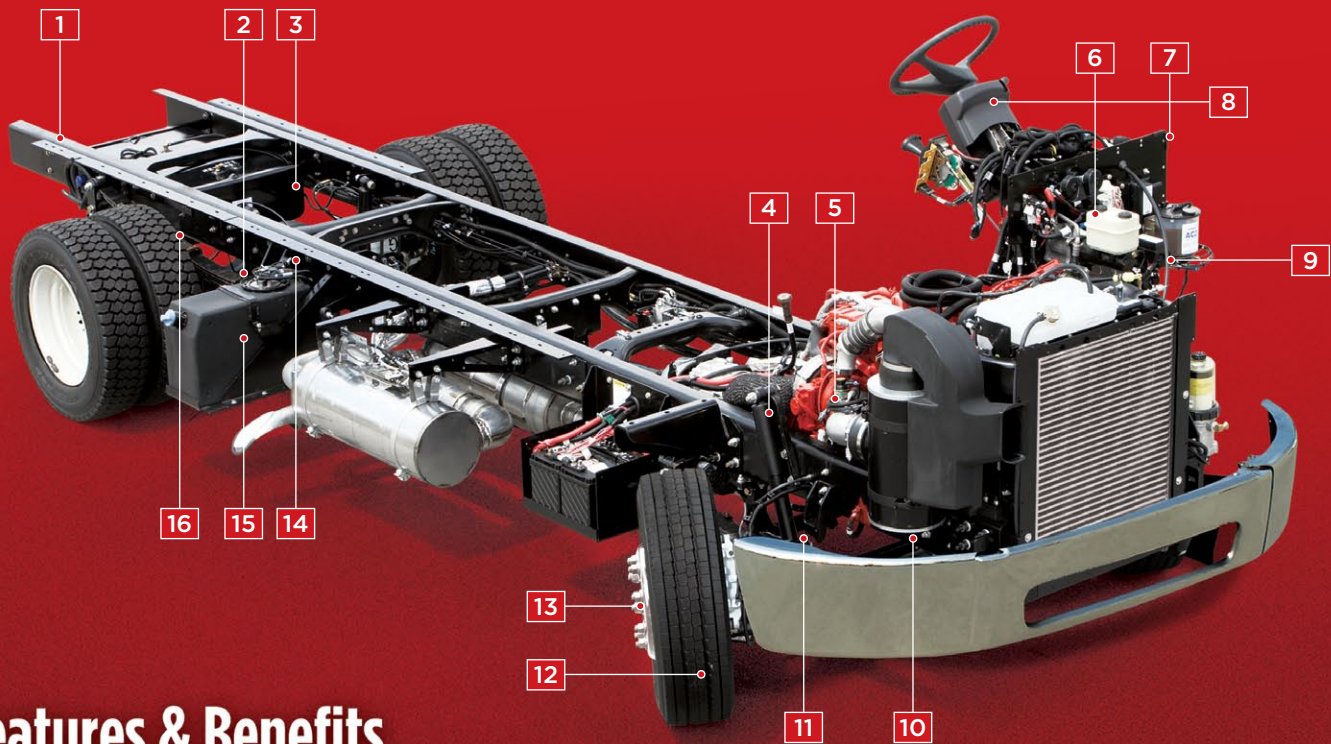

### Features & Benefits

The MT-55 heavy-duty chassis offers a gross vehicle weight rating of between 20,500 and 30,000 lb. and can accept bodies with more than 1,500 cubic feet of volume. With a massive payload capacity of up to 19,000 lb., the MT-55 is the perfect choice for high-payload applications like newspaper delivery, utilities and tool trucks.

1. Durable 9 1/8" x 2 13/16" x 5/16"-thick full-section steel straight-rail frame—among the largest in the industry—reduces flex and bowing to minimize chassis stress while carrying up to 19,000 lb. of cargo
2. AAC® ARS-13.5-2 13,500 lb. F-series rear axle
3. 40-gal. rectangular aluminized steel fuel tank mounted between the frame rails provides fewer fuel stops and enhances safety, left-hand or right-hand fuel fill
4. Allison® 2000 Series HS heavy-duty automatic transmission delivers smooth, precise shifting and improves fuel economy
5. Cummins® 6.7L ISB10 200-hp EGR diesel engine provides durability and lower maintenance costs and produces an excellent balance of low-end torque and high-end acceleration
6. New multiplex sealed instrument cluster and message center with full feature gauge cluster—including electronic fuel level, electronic coolant temperature, electronic engine-oil pressure and electronic speedometer—provide accurate, instant feedback; vehicle information display monitors engine and transmission diagnostics and 30 separate chassis functions
7. Larger operator station for permanent mounting of wiring, hand brake and cables
8. TRW® power steering system and 50-degree wheel cut offer better maneuverability in tight spots (wheel cut may vary, based on optional equipment)
9. Accessible fluid check and fill locations provide easy maintenance
10. AAC AF-8.0-2 8,000 lb. front axle
11. Taper-leaf spring front suspension, rated at a standard 7,000 lb., provides solid, smooth ride.
12. 245/70R 19.5" radial tires provide an extra-wide, extra-deep tread to deliver durability and scrub resistance
13. Four-wheel hydraulic ABS disc brakes deliver reliable, uniform stopping power and better steering control during emergency situations; standard pin-slide brake configuration reduces maintenance time and saves money; air brakes optional
14. Spicer® SPL 70 series drive shafts with grease zerks
15. SCR technology utilizes diesel exhaust fluid (DEF) to reduce NOx levels allowing for more optimized combustion, better fuel efficiency, increased power, less wear on the engine, reduced maintenance, fewer regenerations and better reliability for less downtime compared to an in-cylinder EGR engine
16. Flat-leaf spring rear suspension, rated at a standard 13,500 lb., minimizes cargo shifts on uneven road surfaces; optional Airliner® air suspension rated from 18,000 to 20,000 lb. available

# STANDARD FEATURES AND OPTIONS MT-55 SERIES

## The Optimum Heavy-Duty Chassis

MT-55 SERIES CHASSIS	
<b>Vehicle weight ratings:</b>	20,500 lb. to 30,000 lb.
<b>Engine:</b>	200 hp Cummins® 6.7L ISB10 EGR 6-cylinder diesel with 520 lb./ft. torque @ 1,600 rpm
<b>Optional engines:</b>	220 hp Cummins 6.7L ISB10 EGR with 520 lb./ft. torque @ 1,600 rpm 240 hp Cummins 6.7L ISB10 EGR with 560 lb./ft. torque @ 1,600 rpm 260 hp Cummins 6.7L ISB10 EGR with 660 lb./ft. torque @ 1,600 rpm 300 hp Cummins 6.7L ISB10 EGR with 660 lb./ft. torque @ 1,600 rpm (for emergency applications only)
<b>Cooling system:</b>	690 sq. in. downflow, front-mounted radiator; pre-mixed 50/50 ethylene glycol antifreeze to -35° F; ADC electric on/off fan clutch
<b>Engine equipment:</b>	Engine-mounted oil check; frontal air intake with Farr® ECO BC air cleaner mounted on rail; Denso® 12-volt starter; Delco Remy® 160-amp, 24SI alternator; 2 Alliance® 931 MF batteries delivering 1300 CCA
<b>Optional engine equipment:</b>	Leece-Neville® 200-amp and 270-amp alternator Alliance 1400, 1520 and 1900 CCA batteries Phillips® 1,000-watt block heater
<b>Transmission:</b>	Allison® 2100 HS series automatic
<b>Optional transmissions:</b>	Allison 2100, 2200, 2500 HS/RDS/EVS; automatic 2200 with park pawl
<b>Exhaust:</b>	Single horizontal inboard ATD, outboard SCR with tailpipe exiting forward of rear axle, right-hand side
<b>Optional exhaust:</b>	In-line system with 190" greater wheelbase with left-hand front and rear tire exit
<b>Axles:</b>	
<b>Front:</b>	AAC® AF-8.0-2, 8,000 lb.
<b>Optional front axles:</b>	AAC AF-10.0-3, 10,000 lb., Meritor® FC-965 8,000 lb.
<b>Rear:</b>	AAC ARS-13.5-2, 13,500 lb. F-series rear axle; 4.10 ratio
<b>Optional rear axles:</b>	ARS-17.5-2, 17,500 lb.; ARS-19.0-2, 19,000 lb.; ARS-20.0-2, 20,000 lb.; Axle ratios: 4.30 4.56, 4.78, 5.13 and 5.57 Meritor® RS-15-120, 15,000 lb.; RS-17-144, 17,500 lb.; RS-19-145, 19,000 lb. and RS-19-144, 20,000 lb.
<b>Suspension, steering, brakes:</b>	
<b>Front:</b>	Taper-leaf spring, 7,000 lb., shock absorbers
<b>Optional front suspension:</b>	Taper-leaf spring, 8,000 lb., 9,000 lb. and 10,000 lb.
<b>Rear:</b>	Flat-leaf spring, 13,500 lb., shock absorbers
<b>Optional rear suspension:</b>	Taper-leaf spring, 15,000 lb., 17,500 lb., 20,000 lb. Airliner® air suspension rated from 18,000 to 20,000 lb.
<b>Steering:</b>	TRW® steering column, steering gear; 50-degree wheel cut (wheel cut will vary, based on optional equipment)
<b>Brakes:</b>	4-wheel 2.6" dual-piston hydraulic disc brakes with ABS
<b>Optional brakes:</b>	Air brakes
<b>Tires:</b>	245/70R 19.5", 14-ply; 225/70R 19.5", 14-ply; 255/70R 22.5", 16-ply; 225/80R 22.5", 14-ply
<b>Wheels:</b>	Accuride® 19.5" x 6.75", 8 hub-pilot steel disc brakes
<b>Optional tires and wheels:</b>	22.5" tires; 19.5" and 22.5" aluminum wheels; 22.5" steel wheels
<b>Frame:</b>	5/16" x 2 13/16" x 9 1/8" steel frame, 80,000 psi, 10.8 section modulus
<b>Wheelbase:</b>	178"
<b>Optional wheelbase:</b>	Wheelbase lengths 158", 190", 208", 218", 250", 276" and 300"
<b>Fuel tank:</b>	40-gal. rectangular, aluminized steel fuel tank mounted between the frame rails, left-hand or right-hand fuel fill
<b>Optional fuel tank:</b>	30- and 40-gal. tanks available in optional aluminum 30-, 60-, 90-gal. aluminized steel fuel tank mounted between the frame rails, left-hand or right-hand fuel fill
<b>DEF tank:</b>	10-gal. plastic tank mounted on the right-hand side forward of the rear axle
<b>Cab and equipment:</b>	Operator station; single electric horn; TRW straight, fixed steering column; four-spoke 18" charcoal steering wheel
<b>Optional cab equipment:</b>	Tilt, tilt/telescopic TRW steering column Cab AC prep kit
<b>Instrumentation:</b>	Multiplex wiring instrument cluster; gauges include electronic fuel and DEF level, electronic engine coolant temperature, electronic engine-oil pressure, electronic speedometer with odometer, voltmeter, vehicle information display

Call Freightliner Custom Chassis Corporation at (800) 545-8831, or visit us on the Web at [freightlinerchassis.com](http://freightlinerchassis.com).

02/11, FCC/MC-S-396. Specifications are subject to change without notice. Freightliner Custom Chassis Corporation is registered to ISO 9001:2008 and ISO 14001:2004. Copyright ©2011 Daimler Trucks North America LLC. All rights reserved. Freightliner Custom Chassis Corporation is a subsidiary of Daimler Trucks North America LLC, a Daimler company.

A Partner of:

